

The **BA538C** is an externally powered rate totaliser with separate rate and total displays which will operate from a switch contact, voltage pulse, magnetic pick-off, open collector or a proximity detector input. A novel adaptive measuring technique plus an adjustable digital filter ensure that optimum rate display stability and step response can be achieved over a wide input frequency range.

Main application of the BA538C is to process the pulse output from a flow meter and to display the rate of flow and the total flow in the same or different engineering units. The instrument may be used with any flowmeter having a pulse output proportional to flow rate, such as a turbine flowmeter. When fitted with optional alarms, the instrument can perform simple flow batching applications. Optional pulse and 4/20mA outputs enable the rate totaliser to operate remote counters and analogue instruments.

Control and programming is performed via the front panel tactile push-buttons which 'click' when operated. All the programme functions are contained in easy to understand menus which may be protected by a user definable security code. Display scaling factors employ floating decimal points to simplify calibration.

The front panel is a robust, easy to clean Noryl moulding sealed with a non-reflective, scratch resistant

polyester membrane. A captive neoprene gasket provides an IP65 seal between the enclosure and the panel.

Backlighting is available as an option to improve readability when the BA538C is installed in a poorly illuminated area. High efficiency amber LEDs provide an even glow to enhance display contrast.

Optional alarms provide two galvanically isolated solid state outputs which may be independently programmed for high or low operation on either the rate or total displays. Each output will switch a dc load such as a solenoid valve or sounder, and the status of each alarm is indicated by a display annunciator.

The optional 4/20mA output is isolated and may be programmed to produce an analogue output proportional to any part of the rate display, thus making the BA538C an effective pulse to 4/20mA converter.

Reliability is ensured by an ISO9001 approved quality control system supported by a three year guarantee. The instrument is protected from overrange and reverse connection and incorporates extensive radio frequency filtering.

If flammable atmospheres are present the BA338C should be used. This has the same features as the BA538C, but has been certified intrinsically safe for use in hazardous areas.

BA538C

Externally powered pulse input rate totaliser

General purpose for use with pulse output flowmeters

◆ **Magnetic pick-off, switch contact, proximity detector, open collector or voltage pulse input.**

◆ **Separate rate and total displays.**

◆ **144 x 72 DIN enclosure with IP65 front.**

◆ **Optional:**
Display backlight
Alarms
Pulse and 4/20mA outputs.
External keypad

◆ **3 year guarantee**

www.beka.co.uk/ba538c


BEKA
associates

BEKA associates Ltd. Old Charlton Rd. Hitchin, Hertfordshire, SG5 2DA, U.K. Tel. (01462) 438301 Fax (01462) 453971 e-mail sales@beka.co.uk www.beka.co.uk


SPECIFICATION

Power supply	
Voltage	10 to 30V dc
Current	12mA max., plus proximity detector current when used.
Input	
Switch contact	
Closed	Less than 100Ω
Open	Greater than 1kΩ
Proximity detector	2-wire NAMUR
Magnetic pick-off	40mV peak to peak typical
Voltage pulse	
Low	Less than 1V
High	Greater than 3V; 30V max
Open collector	
Closed	Less than 2kΩ
Open	Greater than 10kΩ
Frequency	
Switch contact	0.01Hz to 100Hz
Other inputs	0.01Hz to 5kHz max
Display	
Type	Liquid crystal
Rate~	6 digits 9.5mm high
Decimal point	1 of 5 positions or absent
Total~	8 digits 14mm high
Decimal point	1 of 7 positions or absent
Grand total	Max count 10 ¹⁶
~Rate or total can be shown on either display	
Remote reset	Contact closure with resistance less than 1kΩ
Programmable functions	
Total dividing scale factor	Adjustable between 0.001 & 99999999
Rate dividing scale factor	Adjustable between 0.001 & 99999999
Rate timebase	Rate may be displayed per second, minute or hour.
Rate display filter	Adjustable digital filter
Environmental	
Operating temperature	-20 to 60°C
Storage temp	-40 to 85°C
Enclosure	IP66 see ITS test report C87IV0383A
EMC	In accordance with EU Directive 89/336/EEC.
Immunity	Less than 1% of rate span error at 10V/m
Emissions	Undetectable above background noise. Class B equipment
Mechanical	
Terminals	Screw clamp for 0.5 to 2.5mm ² cables.
Weight	1.6kg
Accessories	
Alarms	Two independent alarms each of which may be programmed for high or low operation with NC or NO output.
Outputs	Isolated solid state switch
On	Less than 5Ω +0.6V
Off	Greater than 180kΩ
Rating	30Vdc: 250mA
Display backlighting	LED backlight
Vin	18 to 30V dc. May be dimmed by reducing voltage below 18V.
Iin	40mA typical
Re-transmitted pulse	Isolated pulse sink
Width	Adjustable 0.5 to 50ms
On	Less than 60Ω +3V
Off	Greater than 1MΩ
Rating	30Vdc: 10mA
4/20mA output	Galvanically isolated current sink
Voltage drop	5V max
External keypad	Membrane keypad enables instrument to be adjusted without removing the control cover.
Scale legend	Units of measurement marked onto display escutcheon. *
Tag legend	Tag number or applicational information marked onto display escutcheon. *
Stainless legend plate	Stainless steel plate secured to front of the instrument, etched with tagging or applicational information. *
Pipe mounting kit	2 kits are available BA392D and BA393. *

DIMENSIONS (mm)

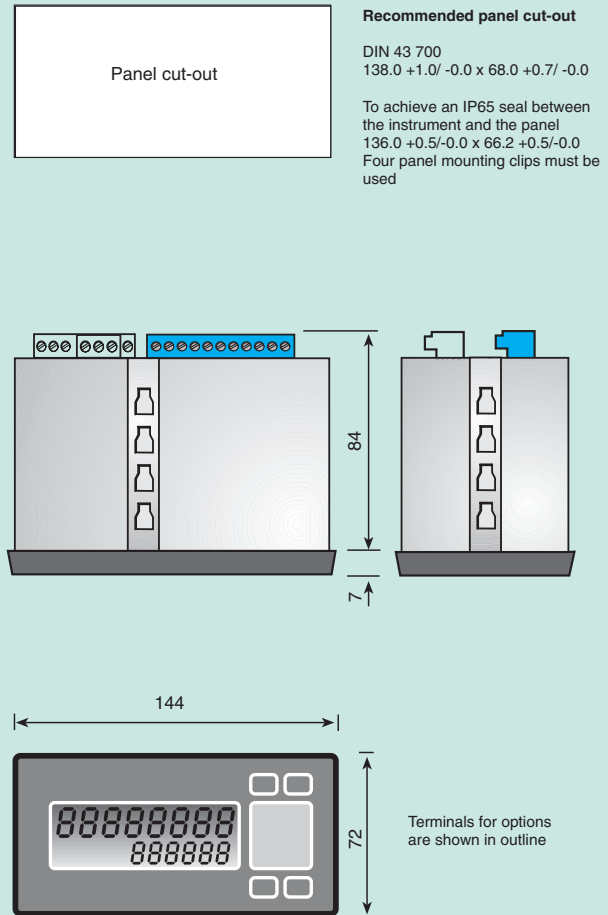

TERMINAL CONNECTIONS

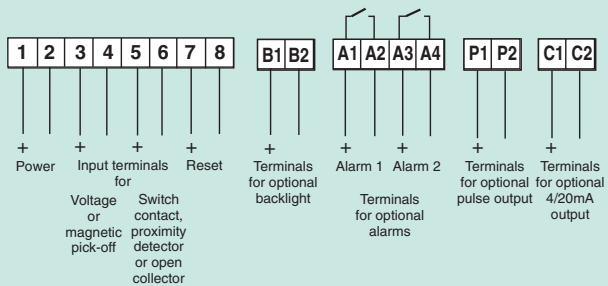

HOW TO ORDER

Model number	please specify BA534D
Input	Type XXXXXXXX #
Rate scaling factor	XXXXXXXX #
Total scaling factor	XXXXXXXX #
Rate timebase	Seconds, minutes or hours #
Accessories	please specify
Display backlight	Backlight
Alarms	Alarms
Re-transmitted pulse output	Pulse output
4/20mA output	4/20mA output
External keypad	External keypad
Escutcheon marking	
Scale	Scale legend required
Tag	Tag legend required
Stainless legend plate	Legend required
Pipe mounting kit	BA392D or BA393

If calibration information is not supplied, instrument will be set for open collector input with rate timebase of seconds, rate scaling factor of 1 and total scaling factor of 1.

* See accessory datasheet for details