Description

Field and panel mounting intrinsically safe externally powered digital timers or clocks with one or two inputs.

Model	Mounting	Number of inputs	Digits	Enclosure material	Panel cut-out mm
BA374G	Field mounting	2	8 x 18mm high & 6 x 12mm high	GRP IP66	N/A
BA377E	Panel mounting	1	8 x 9mm high & 6 x 6mm high	Noryl IP66 front	90.0+0.5/-0 x 43.5 +0.5/-0
BA377E-SS				316-Stainless Steel IP66 front	
BA378E	Panel mounting	2	8 x 18mm high & 6 x 12mm high	Noryl IP66 front	136+0.5/-0 x 66.2 +0.5/-0

Intrinsic safety

IECEx, ATEX and UKEX gas and dust certification.

Code:

II 1 G	Ex ia IIC T5 Ga	-40°C ≤ Ta ≤ +70°C	BA377E & BA378E
II 1 G II 2 D	Ex ia IIC T5 Ga Ex ia IIIC T80°C Db	-40°C ≤ Ta ≤ +60°C -40°C ≤ Ta ≤ +60°C	BA377E-SS
II 1 G II 2 D	Ex ia IIC T5 Ga Ex ia IIIC T80°C Db	-40°C ≤ Ta ≤ +70°C -40°C ≤ Ta ≤ +60°C	BA374G

Parameters:

See intrinsic safety certificate or full instruction manual

Special conditions for safe use

All models	When installed in Zone 0, installation shall be such that an ignition due to impact between aluminium label and iron/steel is excluded.
BA377E-SS	For installation in a Ex e, Ex p or Ex t panel enclosure, all connections must be supplied via appropriate rated and approved equipment meeting input / output safety parameters of external connections. When used in a Group IIIC conductive dust environments instrument terminals shall have at least IP6X protection in accordance with IEC 60079-0. When installed purely as intrinsic safety equipment the ambient temperature range is -40°C ≤ Ta ≤ +70°C.
BA374G	Cable entry devices and stoppers suitable for the intended use, location and protection concept shall be fitted to maintain the ingress protection of the enclosure.

Manuals, certificates and datasheets can be downloaded from https://www.beka.co.uk/eptc

Essential Health & Safety Requirements for externally powered Timers or Clocks BA374G, BA377E, BA377E-SS & BA378E

UK

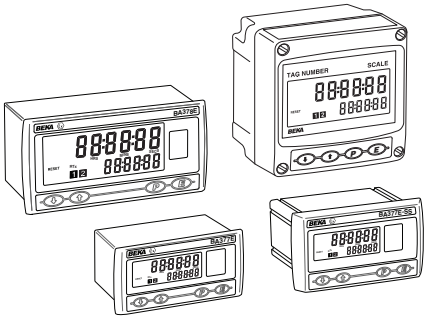

Issue 1
10th June 2024

BEKA associates Ltd. Old Charlton Rd, Hitchin, Hertfordshire, SG5 2DA, UK Tel: +44(0)1462 438301 e-mail: sales@beka.co.uk
web: www.beka.co.uk

Installation & connections: BA374G

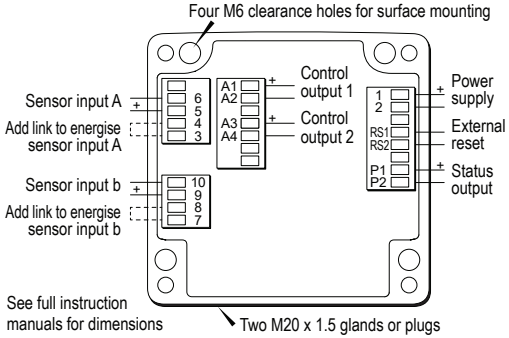

Installation: Panel mounting models BA377E and BA378E

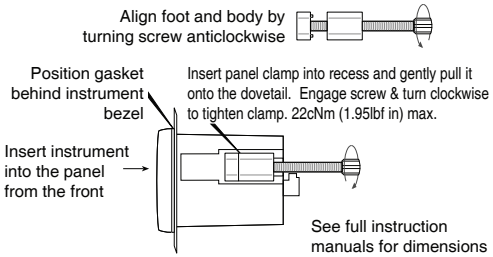

Installation: Panel mounting model BA377E-SS

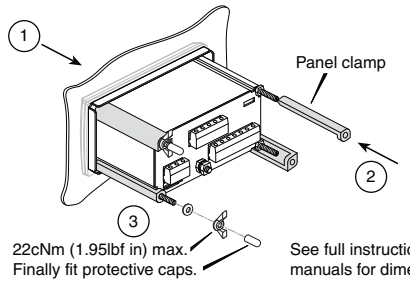

Connections: Panel mounting models BA377E and BA377E-SS

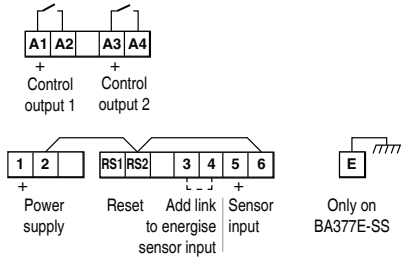

Connections: Panel mounting model BA378E

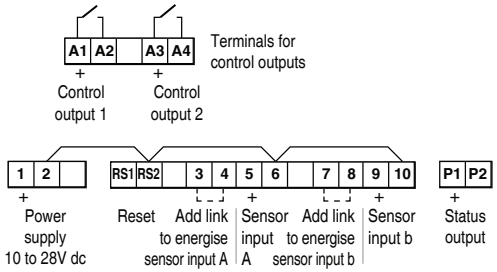

Combined EU Declaration of Conformity

This declaration of conformity for electrical apparatus is issued under the sole responsibility of the manufacturer.

Description

BA374G is field mounting and the BA377E, BA377E-SS and BA378E are panel mounting externally powered Timers or Clocks. The BA377E-SS has a stainless steel enclosure with an impact resistant IP66 front.

Manufactured by

BEKA associates Ltd, Old Charlton Road, Hitchin, Herts. UK. SG5 2DA

Council Directives this equipment complies with:

2014/34/EU (ATEX Directive)

Relating to equipment and protective systems intended for use in potentially explosive atmospheres.

Provisions of the Directive fulfilled by the equipment:

ITS16ATEX28408X issue 3 dated 25/11/2016
Group II Category 1 G
Ex ia IIC T5 Ga -40°C ≤ Ta ≤ +70°C (1)

Group II Category 2 D
Ex ia IIIC T80°C Db -40°C ≤ Ta ≤ +60°C (2)

(1) When a BA377E-SS installation relies on the certified impact and ingress protection provided by the front of the instrument to maintain certification of the panel enclosure in which the instrument is mounted -40°C ≤ Ta ≤ +60°C

(2) Not BA377E & BA378E

Notified Body for EU-Type Examination and production

INTERTEK ITALIA SPA 2575
Via Guido Miglioli, 2/A 20063
Cernusco sul Naviglio (MI) Italy.

Compliant with standards:

EN 60079-0:2012 + A11:2013; EN 60079-11:2012
Compliant with EN IEC 60079-0:2018

2014/30/EU (EMC Directive)

2011/65/EU (RoHS Directive) relating to hazardous substances in electronic and electrical equipment.

2015/863/EU additional substances added by amending Annex II to Directive 2011/65/EU as regards the list of restricted substances.

CE mark first affixed in 2016

Authorised Signatory: Issue 1 23rd Feb 2024

Olivier Lebreton CEng MIET
Managing Director