

Using BA212 Power Isolator

Hazardous area


Specify hazardous Zone, gas or dust group
and temperature rating

Safe area

Each of the eight 4/20mA inputs
is galvanically isolated from
all the other inputs, all have
the following safety parameters:

- Ui = 30V
- Ii = 200mA
- Pi = 0.84W
- Uo = 0
- Io = 0
- Po = 0
- Ci = 0
- Li = 4uH

Complies with
requirements for
simple apparatus

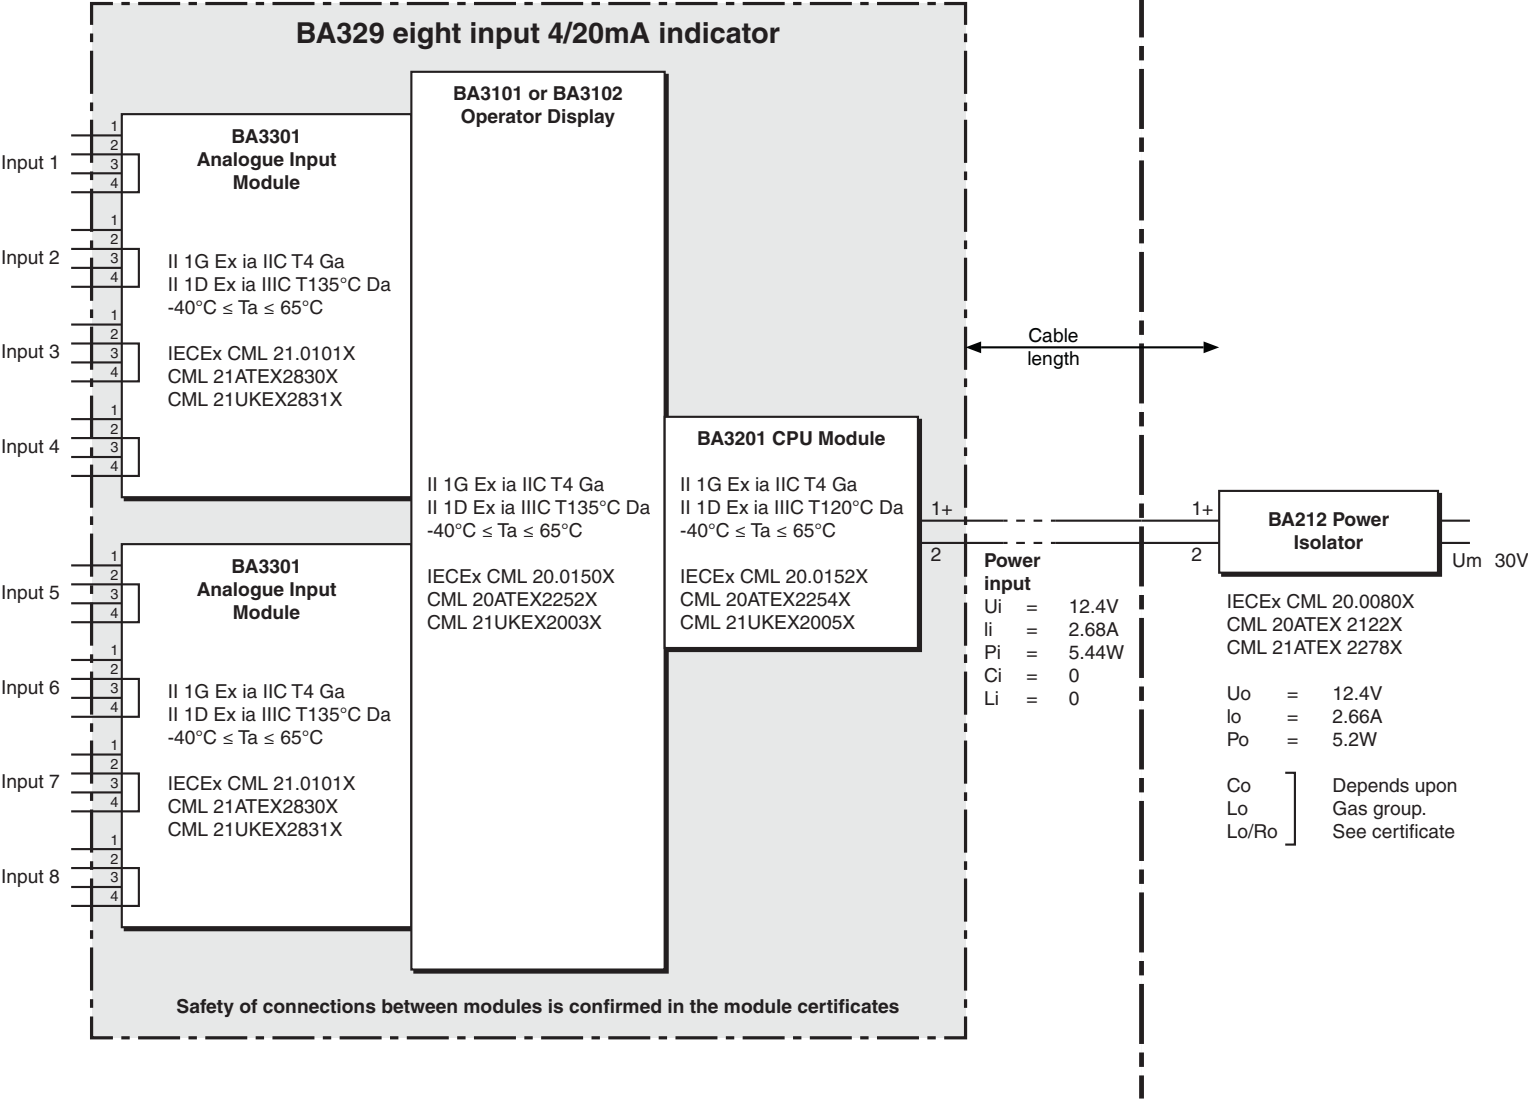

Using BA243 Power Isolator

Hazardous area
Specify hazardous Zone, gas or dust group
and temperature rating

Safe area

